


INDUSTRIAL 1-PORT 802.3BT POE++ TO 4-PORT 802.3AF/AT GIGABIT POE EXTENDER

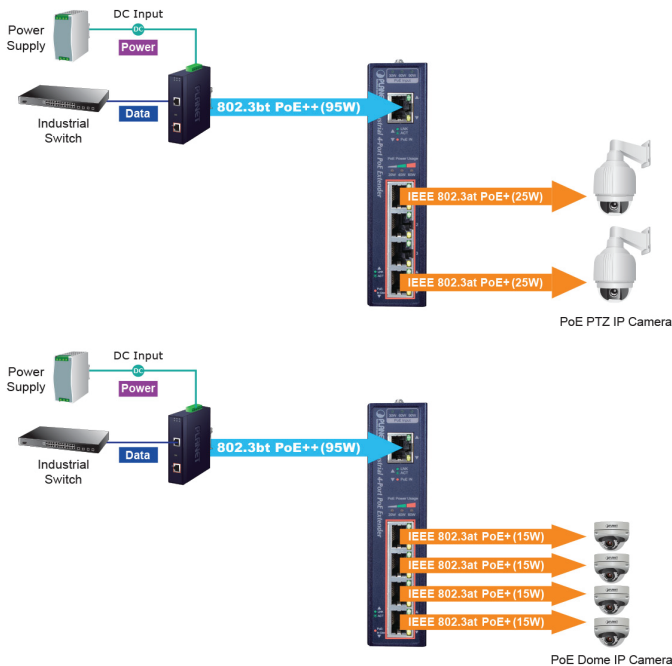

PoE Solution for Long-reach Distance

EM Innovations IPOE-E174 is an industrial 1-Port 802.3bt PoE++ to 4-Port 802.3af/at Gigabit PoE Extender designed especially for the point to multipoint PoE application. The IPOE-E174 can obtain a maximum of 95-watt PoE power from 802.3bt PoE++ input port and supplies a maximum of 75-watt PoE power budget for 4 PoE output ports, extending both the reach of Gigabit Ethernet Data and IEEE 802.3at Power over Ethernet over the standard 100m (328ft.) Cat. 5/5e/6 UTP cable to 200m where up to 4 powered devices (PDs) can be powered at the same time. The IPOE-E174 provides a simple solution for adding PoE ports without running more cabling and achieves more flexible network applications without requiring an external power adapter.

Physical Port	Power over Ethernet	Industrial Case and Installation
- Five 10/100/1000BASE-T Gigabit RJ45 interfaces 1-port data + power input 4-port data + power output	1-port data + power input - Complies with 802.3bt Power over Ethernet Plus end-span and mid-span PD - Complies with IEEE 802.3at Power over Ethernet Plus end-span/mid-span PD - Supports PoE input power up to 95 watts 4-port data + power output - Complies with IEEE 802.3af/at PoE/end-span PSE - Up to 4 IEEE 802.3af/at devices powered - Supports PoE power up to 30 watts for each PoE - Auto detects powered device (PD) Extends the range of PoE to an additional 100 meters (328ft.) Forwards both Ethernet data and PoE power to remote device	IP30 metal case DIN-rail and wall-mount designs Supports 6000V DC Ethernet ESD protection 40 to 75 degrees C operating temperature No external power cable required for installation Plug and Play installation
Layer 2 Features		
Features Store-and-Forward mode with wire-speed filtering and forwarding rates Integrates address look-up engine, supporting 2K absolute MAC addresses 9K jumbo frame support in 1000Mbps duplex mode Automatic address learning and address aging		

INTELLIGENT LED INDICATOR FOR REAL-TIME POE USAGE



Environmentally-hardened Design

With industrial-grade IP30 metal case, the IPOE-E174 provides a high level of immunity against electromagnetic interference and heavy electrical surges which are usually found on plant floors or in curb-side traffic control cabinets. Being able to operate under the temperature range from -40 to 75 degrees C, the IPOE-E174 can be placed in almost any difficult environment.

Making Multiple Business Operations a Lot Easier with PLANET Gigabit PoE Switches & Extenders

-40°C

75°C

PoE Out

60~95W Data+Power

UTP 100m

PoE++



Plug and Play, Easy Cabling Installation

The IPOE-E174 can be easily installed by way of Plug and Play. It is used between a power source equipment (PSE) and the PD. The IPOE-E174 injects power to the PD without affecting the data transmission performance. The IPOE-E174 offers a cost-effective and quick solution to doubling the standard range of PoE from 100 to 200 meters. The IPOE-E174 is designed in a compact box containing 5 RJ45 ports, of which 1 "PoE IN" port functions as PoE (Data and Power) input and 4 "PoE OUT" ports on the other side functions as PoE (Data and Power) output. The "PoE OUT" port is also the power injector where DC voltage is transmitted over Cat. 5/5e/6 cable, and data and power are simultaneously transferred between the PSE and PD.

APPLICATIONS

One Power Source for Multi Powered Devices

Is 100-meter cable long enough for a wide range of IP surveillance deployments? The answer is certainly not. To achieve the benefits of IP surveillance where IP cameras are installed in a remote location, EM Innovations IPOE-E174 is very useful for expanding the network already set up without worrying about the cabling distance limitation. In contrast, the conventional networking does not have the flexibility of network expansion.

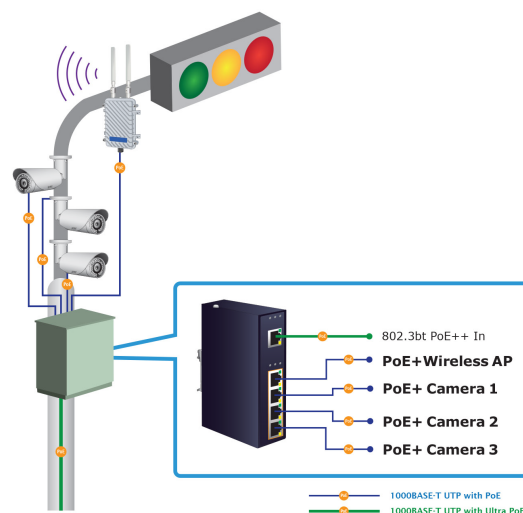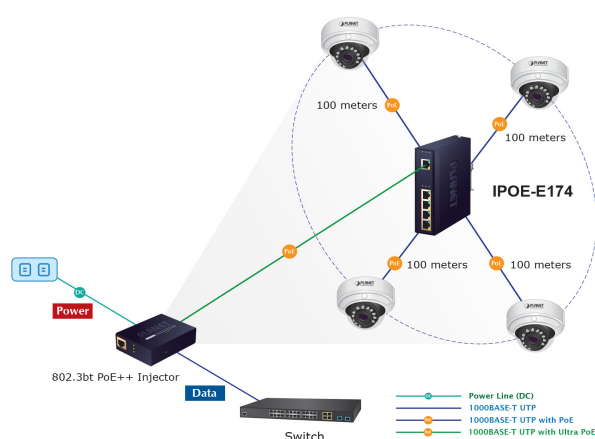


The IPOE-E174 industrial 1-Port 802.3bt PoE++ to 4-Port 802.3af/at Gigabit PoE Extender requires very little installation time and does not require any additional setup or programming by using standard RJ45 cable from power sourcing device, such as 802.3bt PoE++ injector supplying 802.3bt PoE++ power, to the IPOE-E174 and converting power for 4 powered devices that are IEEE 802.3af/at PoE standard compliant, meaning any additional power adapter for IP cameras and wireless access points is not necessary.

PRODUCT SPECIFICATIONS

Model	IPOE-E174
Hardware Specifications	
Data Rate	10/100/1000Mbps
Network Connector	PoE In Port - 1 x 10/100/1000BASE-T Ethernet with 802.3bt PoE++ "Data + DC" in - Auto MDI/MDI-X, auto-negotiation RJ45 connector
	PoE Out Port - 4 x 10/100/1000BASE-T Ethernet with IEEE 802.3af/at PoE "Data + DC" out - Auto MDI/MDI-X, auto-negotiation RJ45 connector
Switch Architecture	Store-and-Forward switch architecture
MAC Address Table	2K MAC address table with auto learning function
Switch Fabric	10Gbps
Switch Throughput	7.44Mpps @ 64Bytes
Flow Control	IEEE 802.3x pause frame for full duplex Back pressure for half duplex
Jumbo Frame	9Kbytes
ESD Protection	Air 8KV DC Contact 6KV DC
Surge Protection	6KV
Enclosure	IP30 metal case
Installation	DIN-rail kit and wall-mount ear
Dimensions (W x D x H)	32 x 87.8 x 135 mm
Weight	430g
Power Consumption	5.6 watts/19.11 BTU (Power On) 6.5 watts/22.18 BTU (Full loading without PoE function) 82.3 watts/280.82 BTU (Full loading with PoE function)
Power over Ethernet	
PoE Standard	PoE In Port - IEEE 802.3bt PoE++ Type 4 standard PD - PoH (Power over HDBASE-T) - IEEE 802.3at PoE+ end-span/mid-span PD Per PoE out Port IEEE 802.3at Power over Ethernet Plus end-span PSE
PoE Power	PoE In Port 50~57V DC, max. 95 watts Per PoE out Port 44~55V DC, max. 30.8 watts
Power Pin Assignment	PoE In Port 1/2(-), 3/6(+), 4/5(+), 7/8(-) or 1/2(+), 3/6(-), 4/5(+), 7/8(-) Per PoE out Port 1/2(+), 3/6(-)
PoE Power Budget	75 watts (max.) @ 802.3bt PoE++ Type 4 input 60 watts (max.) @ 802.3bt PoE+ Type 3 input 75 watts (max.) @ PoH input 25 watts (max.) @ 802.3at PoE+ input
Standards Conformance	
Regulatory Compliance	FCC Part 15 Class A, CE
Stability Testing	IEC60068-2-32 free fall IEC60068-2-27 shock IEC60068-2-6 vibration
Standards Compliance	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Flow Control IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus IEEE 802.3bt Power over Ethernet Plus Plus IEEE 802.3az Energy Efficient Ethernet(EEE)
Environment	
Operating Temperature	Temperature: -40 ~ 75 degrees C Relative Humidity: 5 ~ 95% (non-condensing)
Operating Temperature	Temperature: -40 ~ 85 degrees C Relative Humidity: 5 ~ 95% (non-condensing)

DIMENSIONS

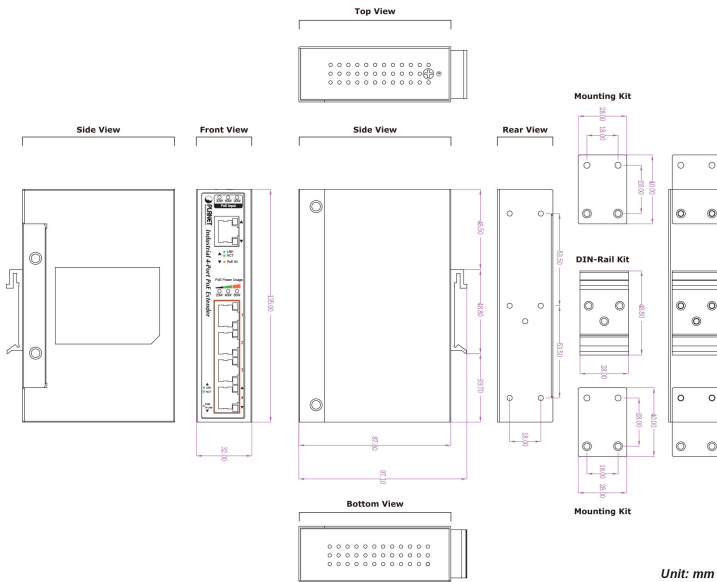

Ordering Information

IPOE-E174

1-Port 802.3bt PoE++ to 4-Port 802.3af/at Gigabit PoE Extender

Ordering Information

IGS-6325-8UP2S2X	Industrial L3 8-Port 10/100/1000T 802.3bt PoE + 2-Port 100/1000X SFP + 2-Port 10G SFP+ Managed Ethernet Switch
IGS-6325-8UP2S	Industrial L3 8-Port 10/100/1000T 802.3bt PoE + 2-Port 100/1000X SFP + Managed Ethernet Switch
IGS-5225-4UP1T2S	Industrial L2+ 4-Port 10/100/1000T 802.3bt PoE + 1-Port 10/100/1000T + 2-Port 100/1000X SFP Managed Ethernet Switch
IPOE-171-95W	Industrial Single-Port 10/100/1000Mbps 802.3bt PoE++ Injector (95 Watts, -40~75 degrees C, 12~48V DC)
IPOE-171-60W	Industrial Single-Port 10/100/1000Mbps 802.3bt PoE++ Injector (60 Watts, -40~75 degrees C)
IGUP-1205AT	Industrial 2-Port 100/1000X SFP to 1-Port 10/100/1000T 802.3bt PoE++ Media Converter
IGUP-2205AT	Industrial 2-Port 100/1000X SFP to 2-Port 10/100/1000T 802.3bt PoE++ Media Converter
IGUP-805AT	Industrial 1-Port 100/1000X SFP to 1-Port 10/100/1000T 802.3bt PoE++ Media Converter
IGS-5225-8P2T2S	L2+ Industrial 8-Port 10/100/1000T 802.3at PoE + 2-Port 10/100/1000T + 2-Port 100/1000X SFP Managed Ethernet Switch
IGS-4215-8P2T2S	Industrial 8-Port 10/100/1000T 802.3at PoE + 2-Port 10/100/1000T + 2-Port 100/1000X SFP Managed Switch
IPOE-260 Series	Industrial 2-Port 10/100/1000T 802.3at PoE+ Injector Hub
IPOE-162S	Industrial IEEE 802.3at Gigabit High Power over Ethernet Splitter
UPOE-800G	8-Port Gigabit 802.3bt PoE++ Managed Injector Hub (400 watts)
UPOE-1600G	16-Port Gigabit 802.3bt PoE++ Managed Injector Hub (600 watts)
UPOE-2400G	24-Port Gigabit 802.3bt PoE++ Managed Injector Hub (800 watts)

EM Innovations

835 Ne Highway 99W, McMinnville, OR 97128, USA

503-838-7055

www.eminnovate.com

sales@eminnovate.com



EM Innovations reserves the right to change specifications without prior notice.

All brand names and trademarks are property of their respective owners.

Copyright © 2020 EM Innovations. All rights reserved.